

RESX07-3U22R

22" Deep, Rear I/O Rugged Rack Server

Low-latency,
high-throughput
rugged rack server

- Dual Intel® 3rd generation Xeon® Scalable processors up to 32 cores
- Designed, tested and manufactured in the U.S.
- Configurable - up to 7 expansion slots that support 4 full-size GPUs
- Storage – up to 16, 2.5" SSDs



TECHNICAL SPECIFICATIONS

Dual Intel 3rd generation Xeon Scalable processors

3 UPI links up to 11.2 GT/s

16 DIMM slots, up to 2,048 GB DDR4-3200 MHz

Intel Trusted Execution Technology (TXT) with integrated TPM 2.0

Management and Operating System

Windows, Linux OS

OpenBMC

IPMI 2.0 management

Expansion and Modular Maintainability

Up to 7 expansions slots:

- Slot 1: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 2: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 3: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 4: PCIe gen 4.0 dual-width x16 FHFL, up to 12" w/ RIO
- Slot 5: PCIe gen 4.0 single-width x16 FHFL, up to 7.5" w/ RIO
- Slot 6: PCIe gen 4.0 single-width x16 FHFL, up to 7.5" w/ RIO

- Slot 7: PCIe gen 4.0 single-width x8 FHHL, up to 7.5" w/ RIO

Up to 16, 2.5" SATA/SAS drives (U.2 option available)

Up to 2 NVMe M.2 slots

Power Supply Options

Triple-redundant (2+1) AC and DC options:

- 1000 W 48 VDC per PSU
- 800 W 28 VDC per PSU
- 1200 W 120 VAC per PSU
- 1600 W 240 VAC per PSU
- 240 VAC per PSU
- MIL-461 options: 3x MIL-STD 750 W 120 VAC, 28 VDC 500 W


Environmental* [Rugged Level 1 Standards](#)

Tested to support full performance of Intel Gold CPUs up to 50C and dual 300W NVIDIA GPUs up to 41C without throttling

Additional Options

- Shock pins
- Slide rails

Partnering with



Mechanical

Height: 3U or 5.25" (133.35 mm)

Width: 17.36" (440.9 mm)


Depth: 22" (558.8 mm) from front to back, 21" (533.4 mm) from ear to back

Weight (Typical)*: 35 lb

19" rackmountable

* Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

Product Naming Chart

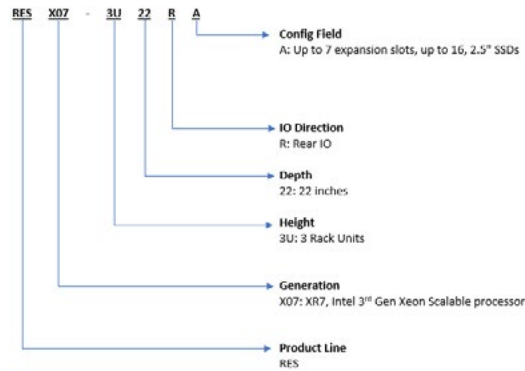

Front View



Rear View



Corporate Headquarters

50 Minuteman Road
Andover, MA 01810 USA
+1 978.967.1401 tel
+1 866.627.6951 tel
+1 978.256.3599 fax

International Headquarters

Mercury International
Avenue Eugène-Lance, 38
PO Box 584
CH-1212 Grand-Lancy 1
Geneva, Switzerland
+41 22 884 51 00 tel

Learn more

Visit: mrcy.com/servers

Contact: servers@mrcy.com



The Mercury Systems logo is a registered trademark of Mercury Systems, Inc. Other marks used herein may be trademarks or registered trademarks of their respective holders. Mercury products identified in this document conform with the specifications and standards described herein. Conformance to any such standards is based solely on Mercury's internal processes and methods. The information contained in this document is subject to change at any time without notice.

