

RES-XR6 1U

20" Deep, 8 Drive, Rear I/O Rugged Rack Mounted Server

- Up to two Intel Xeon Scalable Processors with 28 cores
- Up to 1.5TB DDR4 ECC Memory
- Up to 240TB of Storage and 3 PCIe 3.0 cards
- MIL-STD: 810G/F, 901D, 167-1, 461



A part of the *EnterpriseSeries™*, Mercury's RES-XR6 1U Server employs the latest Intel® Xeon® Scalable (Skylake) Processors to accelerate compute intensive workloads for applications such as signal intelligence, cryptography, AI, surveillance, sensor fusion, analytics, communications, and audio/video processing.

Operations on the Move

Featuring up to two Intel® Xeon® Scalable processors with AVX512, 1.5TB DDR4 ECC memory, 240TB of storage in eight disk drives, expansion slots, and enhanced reliability features, RES-XR6 1U delivers superior workload-optimized performance and hardware-enhanced security for mission critical applications on the move.

Designed for the Field

The system incorporates advanced thermal and mechanical design features to provide superior resilience to shock, vibration, dust, sand, and temperature extremes. Dual redundant, hot swappable AC or DC power supplies provide high availability while a specially designed dust cover and new memory retention + vibration dampeners offer users extra security on the move.

Space Optimized Scalability

Mercury Systems is a leading commercial provider of secure sensor and safety-critical processing subsystems. Optimized for customer and mission success, Mercury's solutions power a wide variety of critical defense and intelligence programs.

Optimized for size, weight, and power (SWaP), the system weighs only 22lbs, is 20" deep, and meets military environmental specifications. A robust array of high speed I/O, storage options, enhanced security features, and expansion choices allow users maximum flexibility for current and future system requirements. The system meets MIL-STD 810G/F for operations on the move.

Proven Performance

Mercury's EnterpriseSeries RES Servers are trusted worldwide for their high-performance, long life cycles, thermal resiliency, compatibility with industry standards, and SWaP optimization. With the latest Intel core-count processors and configurable I/O, RES servers are ideally suited to next-gen radar, mission, advanced simulation, command, control, and battle management processing mission critical applications.

Your Reliable Teammate

With over 30 years of technical expertise, Mercury Systems works closely with customers to design computing solutions that are easy to integrate, affordable, and reliable for years to come.



ACQUIRE



DIGITIZE



PROCESS




STORAGE



EXPLOIT



DISSEMINATE

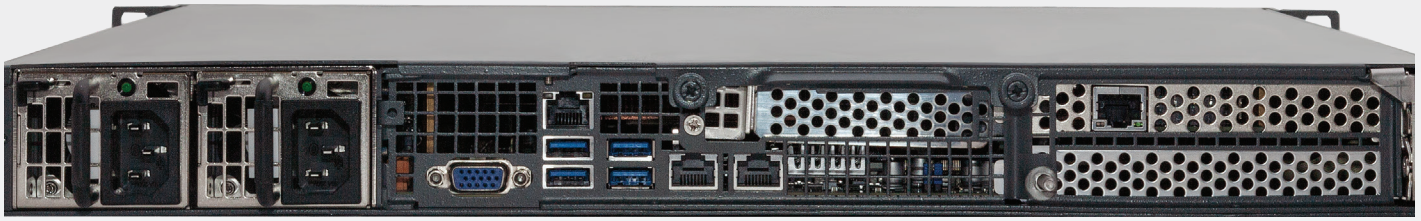

Technical Specifications

2 Intel® Xeon® Scalable Bronze, Silver, Gold, or Platinum CPUs

with up to 28 cores per processor

Up to 1.5TB 2666MHz memory with 12 DIMM slots

Management and Operating System

Windows®, Linux®, VMWARE® and other hypervisors

IPMI v2.0, Redfish option available

Expansion and Modular Maintainability

Up to 3 PCIe 3.0x16 cards

6 Removable Fans

Input/Output Versatility

Front Access

8 Removable, Hot Pluggable, 2.5" SATA/SAS3 drives, U.2 NVME option available

RAID option available

1 Power Switch

Rear Access

2 1GBaseT or 10GBaseT Ethernet Ports (RJ45)

4 USB 3.0

1 IPMI 2.0

1 VGA Graphic Port

Power Supply Options

Single or Redundant 100/240V VAC (47/63Hz, 400Hz)

Single or Redundant 10-36 VDC, 32 Amps

Single or Redundant 36-72 VDC, 18 Amps

MIL-STD 461

Environmental*

Operating

Temperature: 0°C to 50°C

Extended Temperature: -15°C to 65°C

Humidity: 8% to 95% (non-condensing)

Shock: 3 axis, 35g, 25ms

Vibration: 4.76Grms, 10Hz to 2000 Hz (SSD)

Non-Operating

Temperature: -40°C to 70°C

Humidity: 5% to 95% (non-condensing)

Additional Options

Shock Pins

Front Door Filter

Slide Rails

Tamper-Evidence Features

Mechanical

Height: 1U or 1.75" inches (44.45mm)

Width: 17 inches (433.3mm)

Depth: 20 inches (514mm)

Weight (Typical)*: 22 pounds (9.9kg)

19" rackmountable

* Mercury Systems designs all products to meet or exceed listed data sheet specifications. Some specifications including I/O profiles, weight, and thermal profiles are configuration dependent. Contact Mercury for information specific to your desired configuration requirements.

Innovation That Matters and the Mercury Systems logo are registered trademarks and EnterpriseSeries is a trademark of Mercury Systems, Inc. Other product and company names mentioned may be trademarks and/or registered trademarks of their respective holders. Mercury Systems, Inc. believes this information is accurate as of its publication date and is not responsible for any inadvertent errors. The information contained herein is subject to change without notice.

Copyright © 2020 Mercury Systems, Inc.

6507.03E-0820-DS-XR61U8dRIO



INNOVATION THAT MATTERS®

TRUSTED MISSION SOLUTIONS

47200 Bayside Parkway • Fremont, CA 94538 USA
(510) 252-0870 • Fax (510) 490-5529

TRUSTED MISSION SOLUTIONS INTERNATIONAL

5 rue Irène Joliot-Curie • Eybens 38320 France
+33 476 147786 • Fax + 33 476 147789